



FIBERGLASS

- Laminated-

Generalities

Type: HW 34, HGW 37-, HGW 2372, HGW 2372-1, HGW 2372-4


Density: 1.85 to 2.6 g/cm³
Espesores: from 0.3 up to 100 mm.

Other formats and mechanizes
 Upon request.



Technical sheet

	HW	HGW 2372	HGW 2372-1	HGW 2372-4
Tensile strength [N/mm ²]	25	30	30	400
Compressive strength [N/mm ²]	40	35	35	400
Flexural strength [N/mm ²]	35	40	40	400
Elasticity in flexure [N/mm ²]	1800	2400	2400	2400
Electrical strength [Kv/mm]	40	45	45	45
Ignition time [seg]	> 15	> 15	> 15	> 15
Base product	Mate	Fabric	Fabric	Fabric
Resin type	Epoxi	Epoxi	Epoxi	Epoxi
Water absorption	0,2	0,2	0,2	0,2

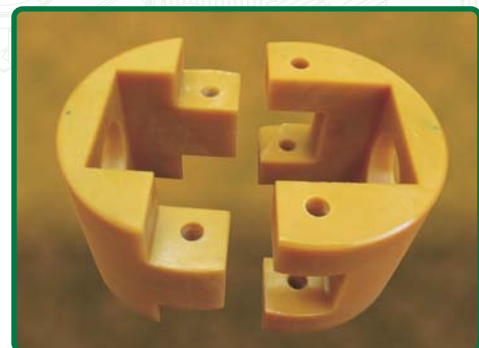

Tlf.: 946 314 289 - | - Fax: 946 313 868
 Barrio San Lorenzo s/n 48390 Bedia (Bizkaia)
 Mail: apyasa@apyasa.com